


# Polarization Maintaining Patchcord

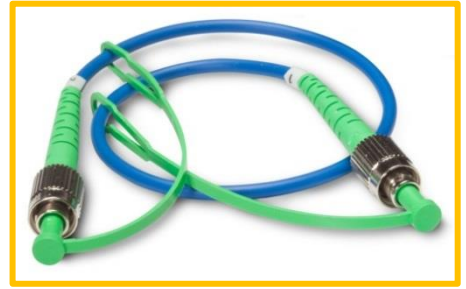

## Applications

- Device interconnection
- Polarization management

## Optical Performance Specifications

Optical Parameter	Unit	Specification	
Connector Type		UPC	APC
Key Orientation		Slow Axis	
Axis Alignment	Deg	+/- 3°	
Typical Insertion loss	dB	0.3	0.4
Maximum Insertion loss	dB	0.5	0.5
Return Loss	dB	≥ 50	≥ 60
Extinction Ratio	dB	≥ 23	≥ 23
Maximum Optical Power	mW	300	
Max. Tensile Load	N	5	
Fiber Type		PM Panda Fiber	
Fiber Length tolerance	%	± 10	

## Ordering Information

PMP	-XX	-XX	-XX	-XX
Article	Connector 1	Connector 2	Fiber jacket	Fiber Length
PM Patchcord	FA = FC/APC FP = FC/PC SP = SC/PC	FA = FC/APC FP = FC/PC SP = SC/PC	02=900µm 03=3mm	05 = 0.5m 10 = 1.0m 15 = 1.5m ...

### Contact information

ID Photonics GmbH  
 Anton-Bruckner-Str. 6  
 85579 Neubiberg  
 GERMANY  
 Tel.: + 49 (0) 89 – 201 899 16  
[info@id-photonics.com](mailto:info@id-photonics.com)  
[www.id-photonics.com](http://www.id-photonics.com)

